BOWL 2616320 C.I.E.

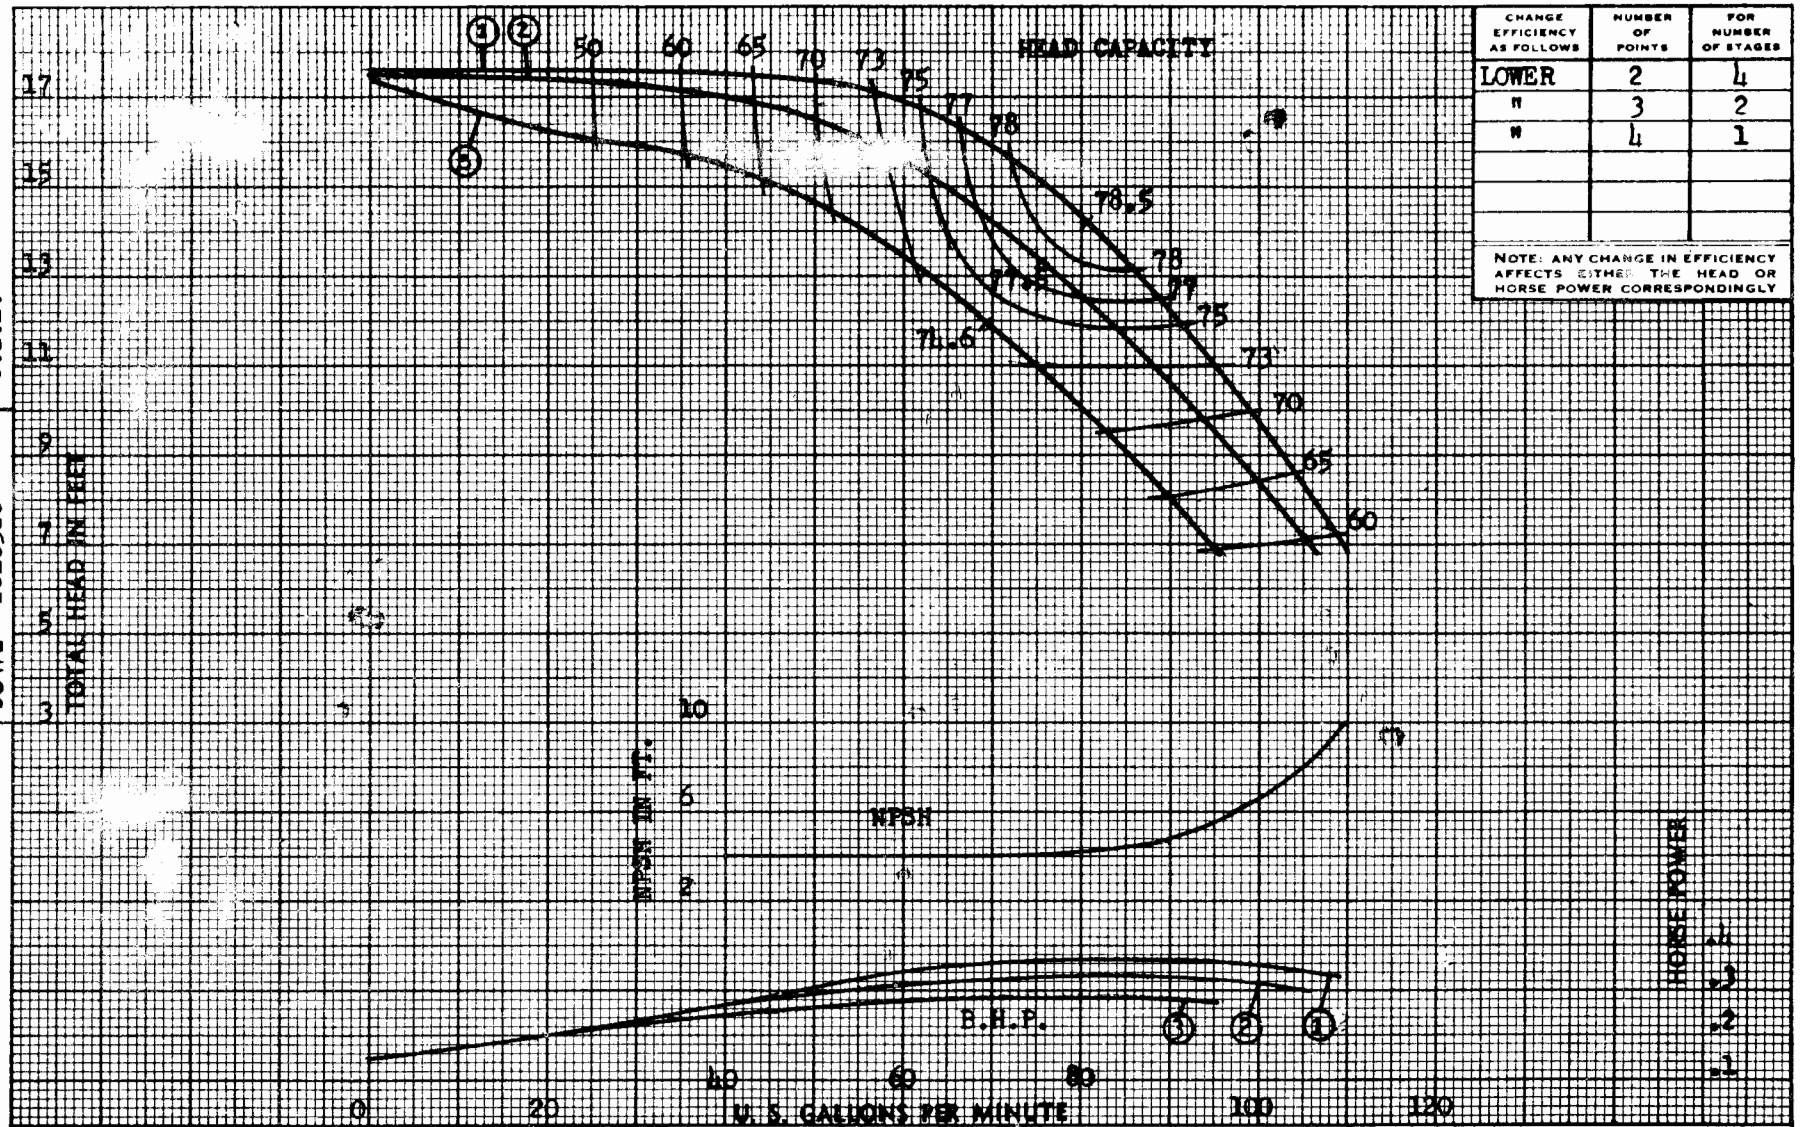

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	2	4
"	3	2
"	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	2618292	4-15/32	35012
2	2618292	4-5/16 x 4-15/32	37220
3	2618292	4-1/64 x 4-15/32	37232

PEERLESS PUMP

HYDRODYNAMICS DIVISION

PERFORMANCE PER STAGE

6 LB — DEEP WELL TURBINE PUMP

1760 — R. P. M.

SHEET NO. 2831830

PRINTED IN U. S. A.